


XJ CHEROKEE STEERING BOX BRACE

PART #: JB-XJ75 APPLICATION: '84+ XJ CHEROKEES

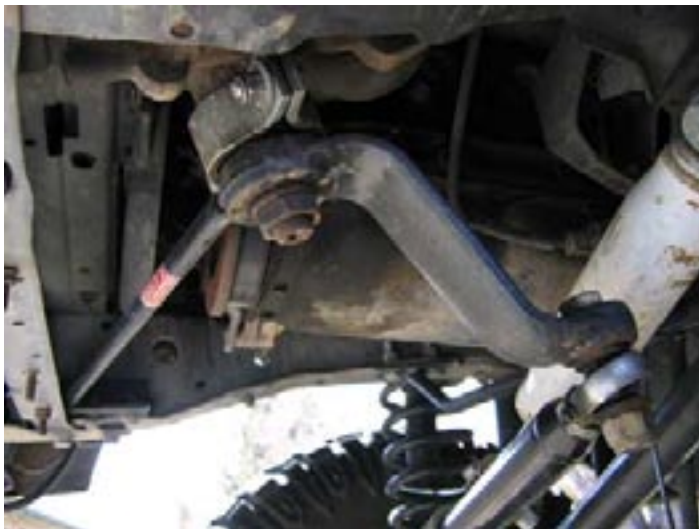

If you're running larger tires on your rig this is something you really need to have. Heavy tires put quite a bit of stress on your steering box and unibody. Help prevent any damage to either by installing a Rusty's Steering Box Stabilizer.

INCLUDED PARTS:

- 1 - Rusty's Steering Box Brace
- 2 - 3/8" Flat Washers
- 2 - Brace Straps
- 1 - 7/16" x 1" Bolt
- 4 - 3/8" x 1" Bolts
- 1 - 7/16" Flat Washer
- 4 - 3/8" Nylock Nuts
- 1 - 7/16" Nylock Nut

- 1) Properly block and secure vehicle prior to installation.
- 2) Remove the front of the rubber mud flap and skid plate if equipped.
- 3) Place the tube brace to the passenger side of the frame, the one existing hole will need to be drilled to 3/8. Then mark the frame and drill the other 3/8 hole. On some early Cherokee's the hole on the front frame section is not there and will need to be drilled to 7/16.
- 4) Loosely place the clamps around the steering box just above the pitman arm. The tube brace will bolt between the inside clamp. Torque the 3/8 bolts to 30-ft.lb. and the 7/16 to 50-ft.lb.
- 5) Carefully turn the wheels to verify there is no interference or binding.

WARNING

IT IS THE OWNERS' RESPONSIBILITY TO INSPECT ALL RUSTY'S PRODUCTS FOR PROPER TORQUE SPECS TO PREVENT LOOSENING OF COMPONENTS. BRAKING AND HANDLING CAPABILITIES ARE DECREASED WHEN LARGER TIRES AND WHEELS ARE USED. SEAT BELTS AND SHOULDER HARNESSES SHOULD BE WORN AT ALL TIMES. RE-CHECK ALL BOLTS AND NUTS AFTER THE FIRST 300 MILES AND AFTER ANY OFF-ROAD USAGE DURING THE FIRST 300 MILES. ALTHOUGH ALL OF OUR PRODUCTS ARE MADE FROM THE HIGHEST QUALITY MATERIALS POSSIBLE, THEY ARE NOT A SUBSTITUTE FOR SAFE AND CAREFUL DRIVING. IN OTHER WORDS, HAVE GOOD SAFE ON-ROAD / OFF-ROAD SENSE. KNOW THE TERRAIN, THE SPEED LIMITATIONS, AND ANY OBSTACLES THAT MAY LIE AHEAD. PLEASE REMEMBER TO PRESERVE OUR RIGHT TO ENJOY PUBLIC LAND THROUGH THE PROPER USE OF OFF-ROAD VEHICLES. THANK YOU FOR CHOOSING RUSTY'S OFF ROAD PRODUCTS.

FOR QUESTIONS OR SUGGESTIONS, CONTACT OUR TECH DEPARTMENT 256-442-0607